



Z-FLEX[®]
CHIMNEY & VENTING SOLUTIONS

Flexible Gas Vent Connector System


Lightweight - Easily Handled - Easily Flexed

INSUL-VENT[®] is a double wall flexible insulated vent connector designed to make insulated connections between appliance and common vent (i.e. B-Vent, masonry chimney, or Z-Flex[®] chimney liner products), easy and economical.

New Unsul-Vent[®] Lateral "Y" makes installation even easier!
Universal B-Vent "Y" adapts to any existing B-Vent Chimney.

Installs in half the time. Simply cut to desired length and attach quick connect ends. No drilling or screwing required. Eliminates costly elbows and accessories.

- Cut to length on site, universal connectors
- 1" clearance to combustibles, same as B-Vent
- For use with Category I appliances that are listed for use with Type B gas vent such as: furnaces, water heaters and boilers.

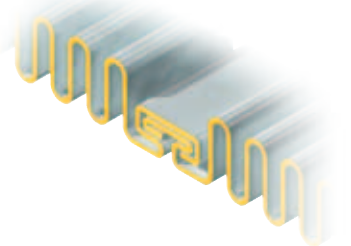


Triple-lock design for strength

Canada only: National Code requires any atmospheric (Category I) gas fired appliance 77MBTU and under must have an insulated vent connector.



Double-Wall Insulated Vent Connector Kit - Insul-Vent™

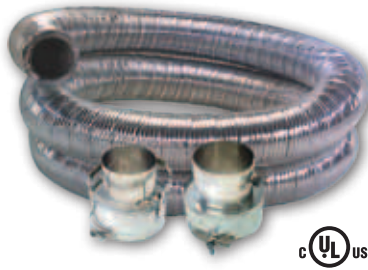


Double Wall Insulated Vent Connector Kit
Insul-Vent™ includes: UL approved double-wall length of Insul-Vent™, Appliance Connector, Universal Connector. Please specify diameter and length at time of order.

Single-Wall Vent Connector Kit - Single-Vent™



Single Wall Vent Connector Kit - Single-Vent™
includes: UL approved Single Wall Flex, Appliance Connector, Universal Connector. Please specify diameter and length at time of order.

Typical Installations*

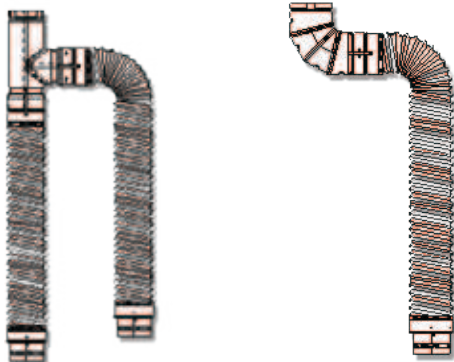

Multiple Appliance B-Vent Single Appliance B-Vent

***All drawings are for illustrative purposes only. Please refer to guide for specific U.L. installation instructions. Always defer to local building codes.**

Z-Flex Connector System

This cULus listed connector meets the requirements of NFPA 54, ANSI 2231 and NFPA 211.

Usage

Double-wall flexible vent connector for connecting one or more appliances to double-wall Type B gas vents and listed Z-Flex liners. Use only with Category I appliances listed for use with Type B gas vent.

Warning

Do not enclose. Do not pass through walls, floors or ceilings.

U.S.A.

20 Commerce Park North, Bedford, NH 03110-6911
tel: 603.669.5136 fax: 603.669.0309

www.z-flex.com email sales@z-flex.com

CANADA

452 Attwell Drive, Etobicoke, ON M9W 5C3
tel: 416.679.0045 fax: 416.679.0051